


Technical Specification

Description	Parameter
Machine type	PC150
Working capacity	153 m ³ /h
Tipping capacity	1200 kg
Compactor weight	5480 kg (12 m ³)
	5770 kg (16 m ³)
	5980 kg (18 m ³)
	6180 kg (20 m ³)
Compaction plate	500 mm X 1950 mm
Volume compaction chamber	1.7 m ³
Compaction force	360 kN
Cycle time approx.	40 sec
Electrical motor	5.5 kW
Power Supply	400 V±5%
Rear door locking	Hydraulic locking (Mechanical locking(optional))

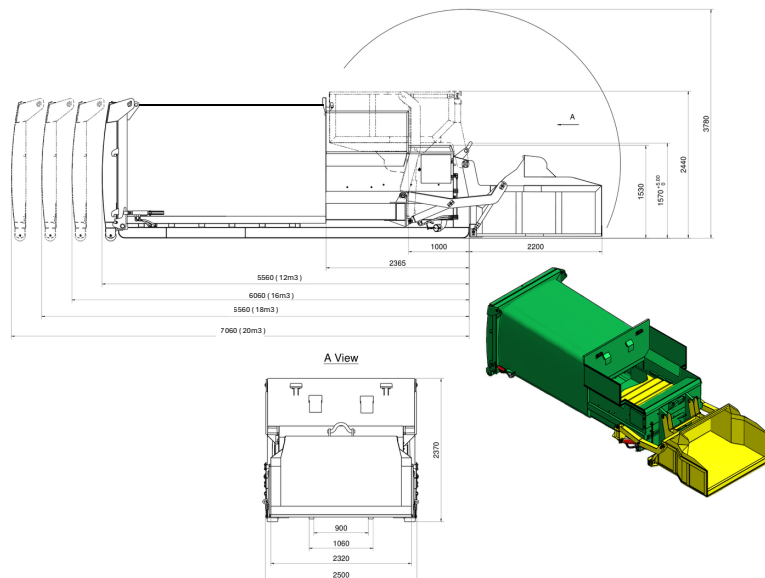

- Details and specifications may differ from picture shown, depending on models.

PT. OGB Environmental Technologies
Grand Kota Bintang Blok C1-C2
Bekasi Barat -17142.
sales@ogbenvtech.com



PC150-Tipcart Compactor-Features

PC150 has a 1.7m³ compaction chamber and a cycle time of 40 seconds it delivers up to 153 m³/h throughput. With a 360 kN compaction force, ensuring efficient waste volume reduction and lower transportation costs. It is equipped with a large tipcart to receive waste from small and medium size collection vehicles. A reliable hydraulic rear door locking ensures the locking and sealing of the container. It is ideally used at small transfer stations, industrial facilities, hospitals, markets, malls, et cetera for high compaction of mixed municipal waste.

