


**BUILT TO OPEN
ENGINEERED TO LAST**



Reliable Solution for a Sustainable Future

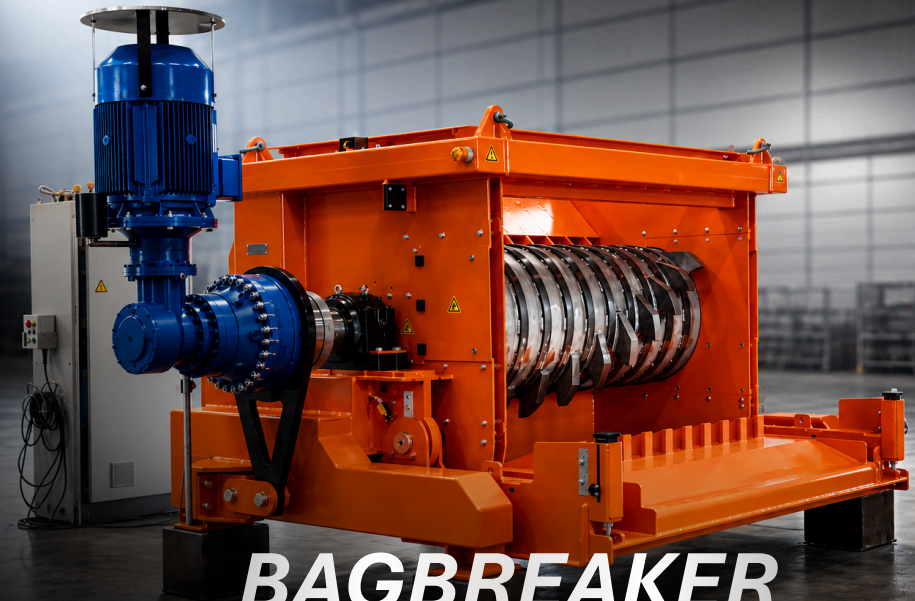

BAGBREAKER

2000 | 2500 | 3000

Industrial Waste
Bag Opening System



OGB Engineering B.V.

Welbergweg 74 7556 PE - Hengelo OV
Netherlands
+31 6 52 660099
Email:
info@ogbengineering.com

ogbengineering.com



High Performance
& Durability



Low Energy
Consumption



Easy Operation
& Maintenance



Reliable Solution
for Your Plant


BAGBREAKER

The Bagbreaker Series is specifically designed to efficiently open municipal solid waste bags while preserving the integrity of recyclable materials. Delivering the power of a shredder with significantly lower energy consumption, wear, and operating costs, it ensures a consistent material flow for efficient downstream sorting, recycling, composting, and RDF production.

Technical Comparison

Specification	BB2000	BB2500	BB3000
Installed Drive Power	30–60 kW (1×30 / 1×45 / 2×30)	60–90 kW (2×30 / 2×45)	90–110 kW (2×45 / 2×55)
Maximum Torque	64.000 Nm	54.000 Nm	75.000 Nm
Trommel Length	2.100 mm	2.600 mm	3.100 mm
Trommel Diameter	800/1000 mm	800/1000 mm	800/1000 mm
Machine Weight	<11t (single) <13t (double)	<12t (single) <14t (double)	<13t (single) <15t (double)
Hopper Weight	0.8 - 3.0t	1.2 - 4.0t	1.4 - 5.0t
Energy Consumption	0.65 kW/t	0.65 kW/t	0.65 kW/t
Control System	Siemens Touch Screen	Siemens Touch Screen	Siemens Touch Screen

- Details and specifications may differ from picture shown, depending on models.



Key Features



Double Sidewall
High-strength wear components for maximum durability



Hardox Wear Parts
High-strength wear components for maximum durability



Siemens
Smart operation with 7-inch touch display.



Auto Reverse
Automatically clears temporary blockages.



Hydraulic Door
Quick maintenance and easy cleaning



Low Energy
Lower operating cost than conventional shredders.

✓ **Online Monitoring**

✓ **Variable Speed**

✓ **VPN Remote**

✓ **Easy to use**

✓ **Easy Maintenance**

✓ **Seal Protection**

Designed to deliver intuitive operation, real-time process monitoring, alarm management, and reliable machine performance.

